


Abmessungen

Weiche Aufsatzbacken

mit Verzahnung 1,5 x 60°

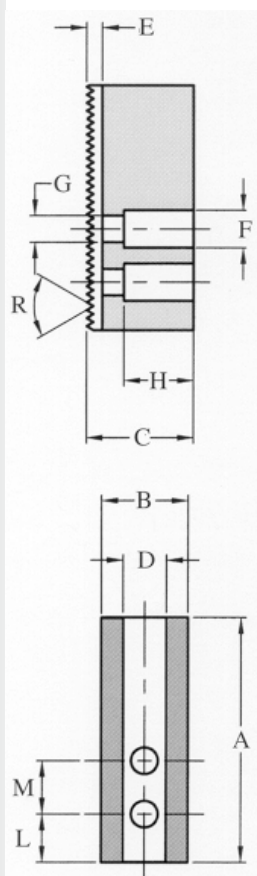


Futtergröße in mm	Bestell- Nummer	A	B	C	D H7	E	F	G	H	L	M
165	8820-17625	70	30	30	12	4	14	9	21	11	17
210 210KB	8820-21625	80	35	35	14	4,5	19	13	22	12	19
254 265KB	8820-26625	100	40	40	16	4,5	19	13	27	12	19
305KB	8820-31625	120	50	50	18	5	23	15	35	15	25
380 460 500	8820-38625	150	60	60	22	5	32	21	45	20	31

Abmessungen

Weiche Aufsatzbacken

mit Verzahnung 1/16" x 90°

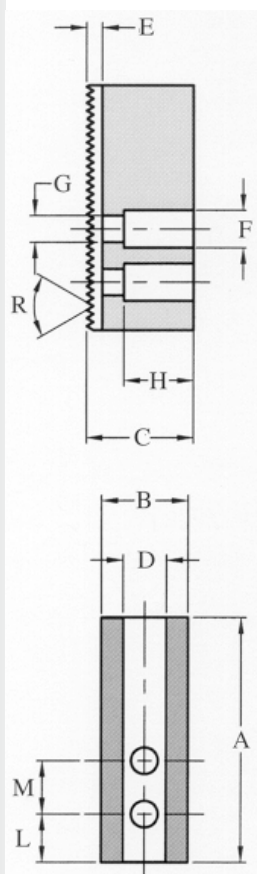


Futtergröße in mm	Bestell- Nummer	A	B	C	D H7	E	F	G	H	L	M
165	8820-17612	70	30	30	12	4	14	9	21	11	17
210 210KB	8820-21612	80	35	35	17	4	19	13	22	12	19
254 265KB	8820-26612	100	40	40	17	4	19	13	27	12	19
305KB	8820-31612	120	50	50	21	4	25	17	37	16	25
380 460 500	8820-38612	150	60	60	25,4	5	32	21	45	20	31

Abmessungen

Harte Umkehr-Aufsatzbacken

Verzahnung: 1,5 x 60°

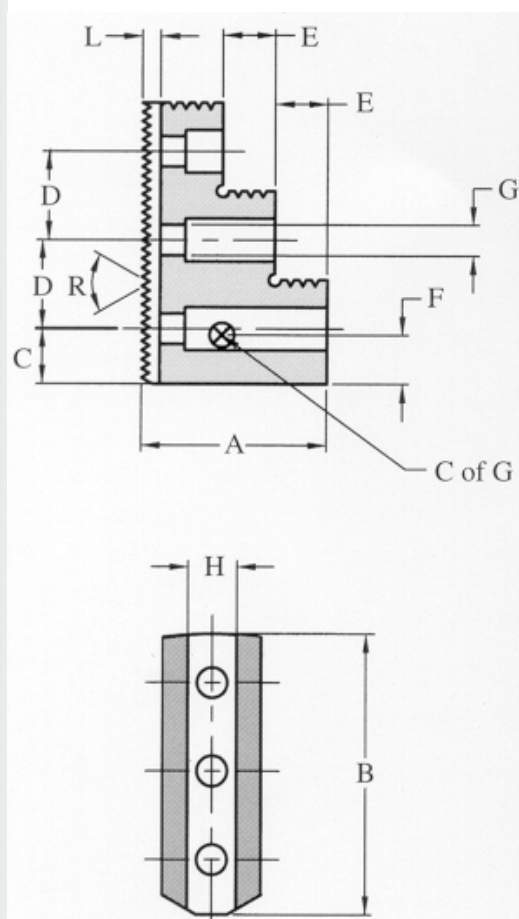


Futtergröße in mm	Bestell- Nummer	A	B	C	D	E	F	G	H H7	L	kg pro Satz
165	8130-17624	40	65	17	17	10	29	9	12	4	0,87
210	8130-21624	50	78	22	19	12	32	13	14	4,5	1,8
210KB											
254	8130-26624	50	78	22	19	12	32	13	16	4,5	1,8
265KB											
305KB	8130-31624	60	126	30	25	14	46	15	18	5	3,8
380											
460	8130-40624	75	126	39	31	18	53	21	22	5	6,4
500											

Abmessungen


Harte Umkehr-Aufsatzbacken

Verzahnung: 1/16" x 90°

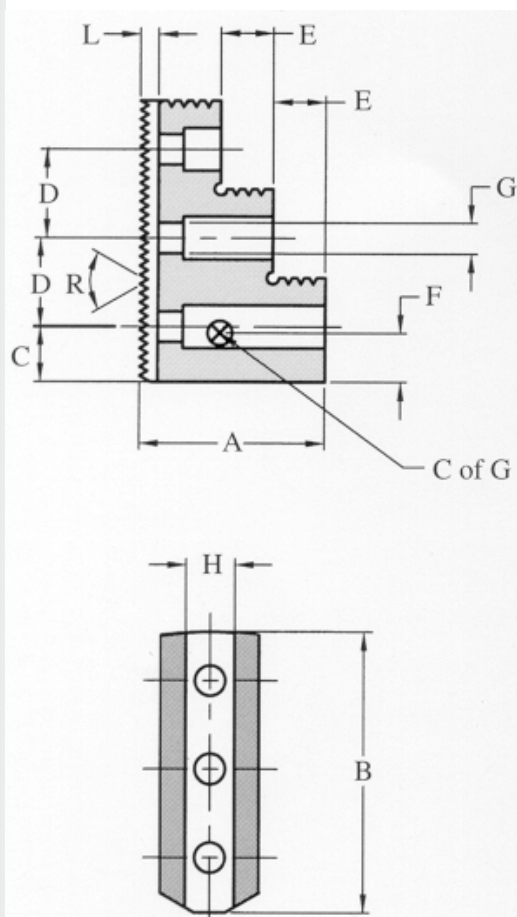

Futtergröße in mm	Bestell- Nummer	A	B	C	D	E	F	G	H H7	L	kg pro Satz
165	8130-17611	40	65	17	17	10	29	9	12	4	0,87
210 210KB 254 265KB	8130-21611	50	78	22	19	12	32	13	17	4	1,8
305KB	8130-31611	60	126	30	25	14	46	17	21	4	3,8
380 460 500	8130-40611	75	126	39	31	18	53	21	25,4	5	6,4

Spannbereiche mit harten Standard-Umkehraufsatzbacken
(weitere Spannbereiche mit Sonderaufsatzbacken möglich)

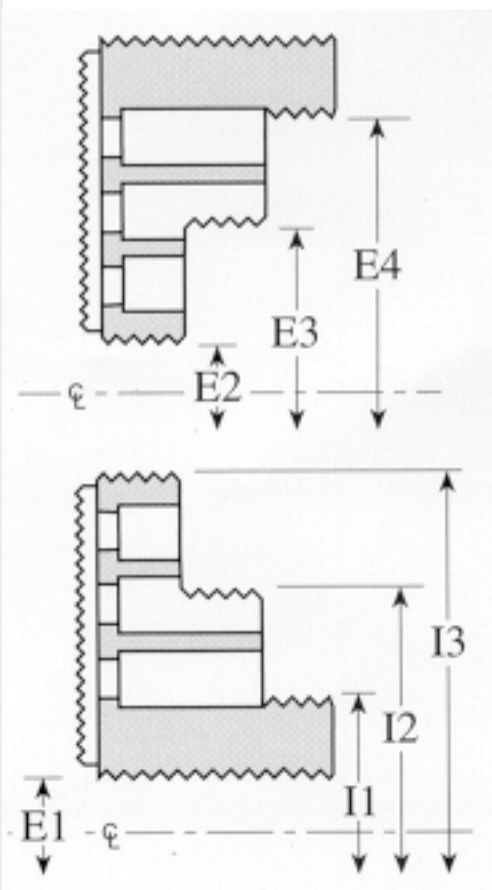

Futtergröße in mm	E1	E2	E3	E4	I1	I2	I3
165	Jul 80	18-87	68-134	116-184	46-115	92-164	136-212
210	10-104	25-119	84-176	136-225	60-152	108-203	164-258
210KB	24-104	39-119	98-176	150-225	74-152	122-203	178-258
254	17-144	30-159	89-214	140-266	70-190	117-241	173-288
265KB	28-155	41-170	100-225	151-277	81-201	128-251	184-209
305KB	16-160	26-190	110-272	190-356	70-204	146-288	223-270
380	24-202	58-235	160-335	260-433	86-250	180-350	274-447
460	64-284	98-317	200-417	300-515	126-332	220-432	314-595
500	68-320	102-353	204-453	304-551	130-368	224-468	318-565